



The SX-660

One of our most popular models is the is the SX-660 with a maximum lifting capacity of 140,000 lbs. This pipelayer is ideal for pipe sizes 24" to 42".



Specifications

Engine

Type	Caterpillar
Model	C9 ACERT
Net flywheel power (DIN 6270-SAEJ 1349)	350 HP - 261 kW
Governed speed	2,200 rpm
Displacement	629 in ³ (10.3 L)

Hydraulic System

Main pumps	(Bosch-Rexroth) 3 independent variable pumps
Maximum capacity	1 x 119 US gal/min (2 x 180 L/min)
Maximum operating pressure	6,090 p.s.i. (20 bar)
Service pumps	1 tandem gear type
Maximum capacity	13 US gal/min (50 L/min)

Transmission

Type	Hydrostatic closed circuit
Brakes	(2) Integrated negative control
Final drives	Epicycloidal oil soaked
Maximum speed:	
- 1 speed	1 mph (2.6 km/h)
- 2 speed	3.8 mph (6.2 km/h)

Controls

Type	Twin pilot operated
Safety	Emergency shut-off
TPS System: twin steering system with two levers to control the tracks independently in order to achieve small and precise movements.	

Track Frame

Hard track frame with sealed and lubricated chain	
Number of bottom rollers	8+8
Number of carrying rollers	2+2
Gauge	7.9 ft (2.4 m)
Length of track on the ground	11.8 ft (3.6 m)
Standard shoes width	30 in (75 cm)
Ground contact area	8,370 in ² (54,000 cm ²)
Optional shoes width	32 in (81.3 cm)
Ground contact area	8,928 in ² (57,600 cm ²)
Pitch Chain	8.47 in (21.5 cm)

Adjustable Counterweights

QD-CS: quick-disconnected counterweight system for quick disassembly. (entire counterweight pack.)	
Removable Counterweight	13 leaves 1,300 lb (600 kg) each
Total weight extendable	21,825 lb (9,900 kg)

Boom

Type	Std. 20 ft (6.1 m) welded box square section
Optional	24 ft (7.4 m) welded box square section
Diameter wire rope	3/4 in (19 mm)
Minimum breaking strength rope	72,530 lb (323 KN)
Part load line	6
Part boom line	5

Fluid Capacities

Fuel tank	82 US gal (310 L)
Hydraulic system circuit	74 US gal (280 L)
Cooling system	12 US gal (45 L)
Engine oil	7 US (27 L)
Final Drive Each	1.9 US (7 L)

Electric System

Operating voltage	24 V
Maintenance free supplied batteries	2
Capacity (total)	220 Ah
Starter capacity	7.5 Kw
Alternator	55 A

Winch Specifications

Hydraulic Winches

Type	Hydraulic controlled drums (reversible.) Driven by variable flow hydraulic pump and control valve block in open circuit.	
Final drive	Compact hydrostatic drive unit, 3-stage planetary gear	
Brakes	Integrated oil bath multiple disk brake, spring applied hydraulic release	

Winch	Hook	Boom
Drum diameter	15.3 in (39 cm)	15.3 in (39 cm)
Flange Diameter	23.2 in (59 cm)	20.8 in (53 cm)
Drum Length	14.1 in (36 cm)	14.1 in (36 cm)
Capacity (19 mm - 3/4 in)	446 ft (136 m)	344 ft (105 m)
Wire rope installed	394 ft (120 m)	230 ft (70 m)
Hook Speed	0-52 ft/min (0-16 m/min)	

Engine

Type	Bosch-Rexroth axial piston variable displacement pump
------	---

Control

Type	Pilot units for remote control of winch motors Progressive and sensitive operations
------	--

Valves

Type	Bosch load-sensing mobile control block proportional directional valves
Maximum capacity	75.5 US gal/min (286 L/min)
Working pressure	4,642 p.s.i. (320 bar)


Hydraulic Tank

Type	Pressurized type
Max capacity	30.4 US gal (115 L)


Filter

Type	Donaldson FI0500
Maximum capacity	132 US gal/min (500 L/min)

Lifting Capacity

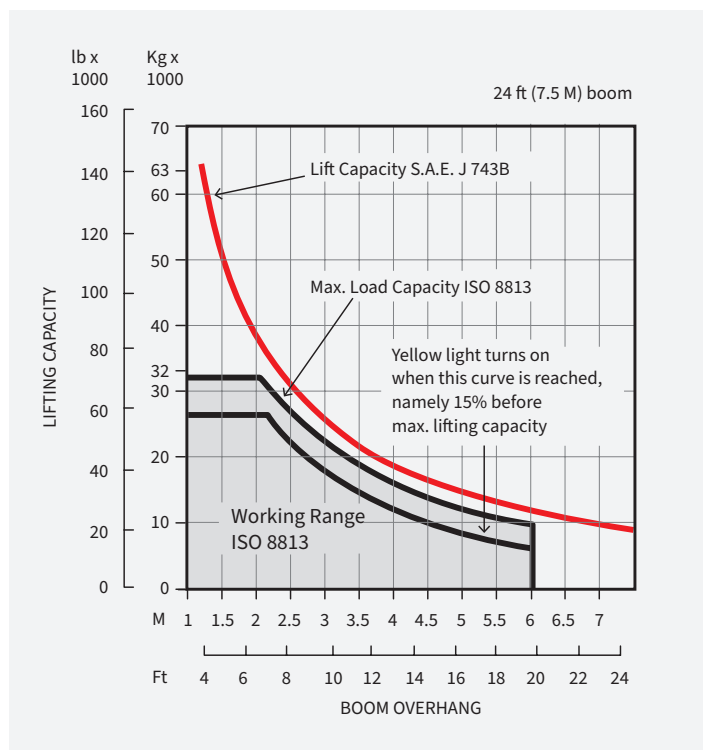

Dimensions

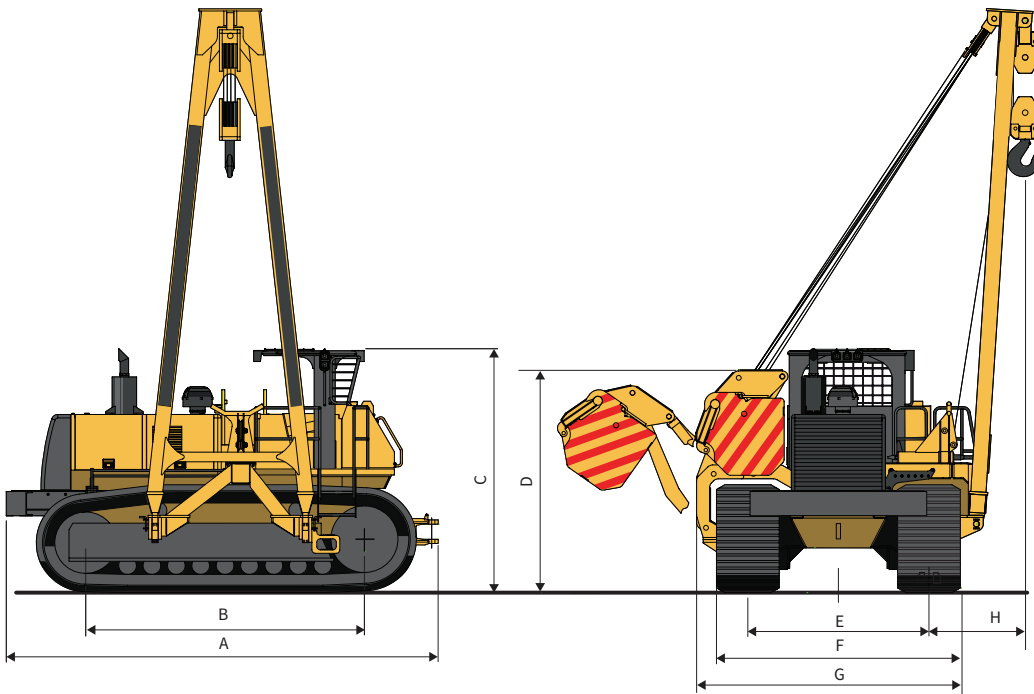

A	17.7' (5.4 m)
B	12.1' (3.68 m)
C	10.8' (3.3 m)
D	3.2' (98 cm)
E	7.9' (2.4 m)
F	<i>Std. Shoes</i> - 10.3' (3.15 m) <i>Opt. Shoes</i> - 10.7' (3.25 m)
G	<i>Std. Shoes</i> - 11' (3.36 m) <i>Opt. Shoes</i> - 11.2' (3.4 m)
H	<i>Min</i> - 3.9' (1.22 m) <i>Max</i> - 25' (7.5m)



2200 Post Oak Blvd., Ste. 1400, Houston, TX 77056

Main 281.457.4400 | U.S. Toll Free 800.383.2666 | sales@superiormftg.com | www.superiormftg.com

Weights and dimensions are approximate. All information is subject to change without notice. Superior Manufacturing is a trademark of Worldwide Machinery. All other trademarks are the property of their respective owners. All rights reserved.

WORLDWIDE
MACHINERY

Exclusive Distributor of Superior Manufacturing